


CONSTRUCTION GUIDELINE

TYPICAL 26 KV SWITCH TERMINATION ASSEMBLY

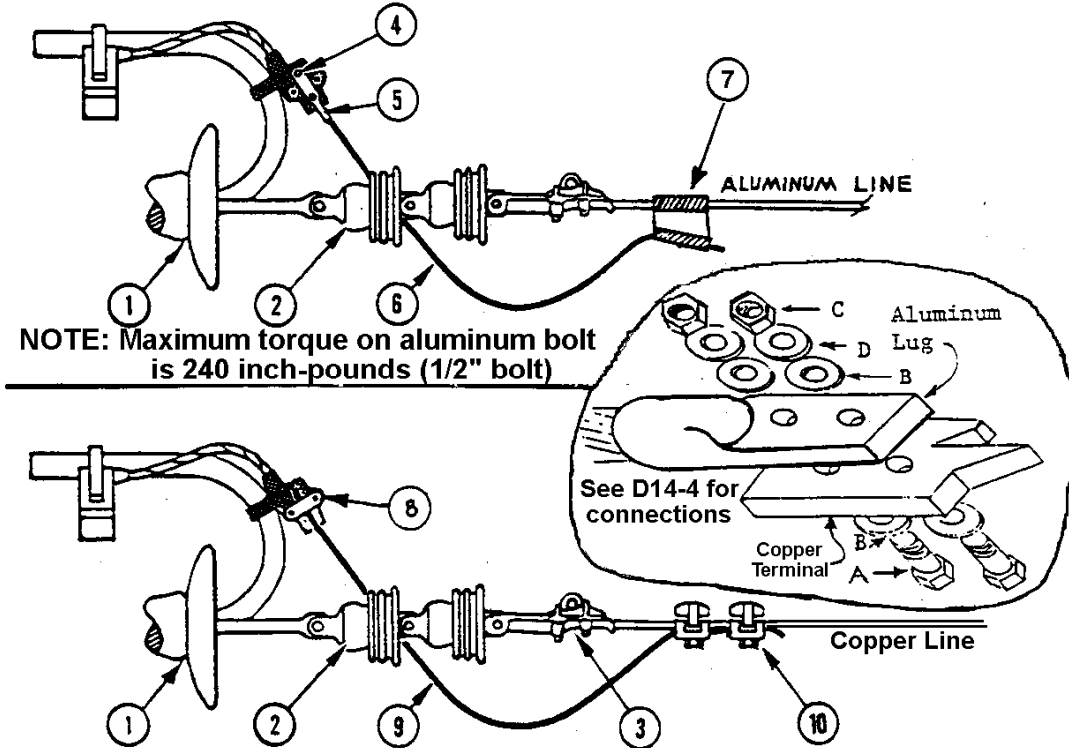

BILL OF MATERIAL

ITEM	QUANTITY	DESCRIPTION	STOCK NO.
1	1	SWITCH, KPF or S&C	As Specified
2	12	INSULATOR, 6" suspension	690208
3	6	CLAMP, DE Strain	Copper #4 581332E #2 581333 1/0 to 300 693901 Aluminum 3/0 to 477 694292 795 to 954 694294
4	12	(A) BOLT, 1/2"-13 x 2-1/2", (B) WASHER, Al., (C) NUT, Al., (D) WASHER, Belleville Spring	782051
5	6	TERMINAL, Compression, Cable to copper pad 4/0 to 500 650267 TERMINAL, Compression, Cable to 4 hole pad 4/0 to 500 651224	
6	35 ft.	WIRE, All Aluminum 397.5 AAC 600113 954 AAC 600126	
7	6	CONNECTOR, Tap, Ampact	See D14-1
8	6	TERMINAL, Bolted, Copper	Supplied with switch
9	35 ft.	WIRE, Copper, Jumper #2 610434 2/0 610425 4/0 610414	
10	12	CONNECTOR, Tap, 2-bolt, parallel	669379E thru 669384

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Jim S. Horn</i>	<i>Charles L. Shaffer</i>	<i>John C. Skinner</i>	<i>Betty Robm</i>