


Bracket, Communications, Cable Attachment


All dimensions are in inches.

Tolerances: Holes - 0", + 0.031"; all other ± 0.125"

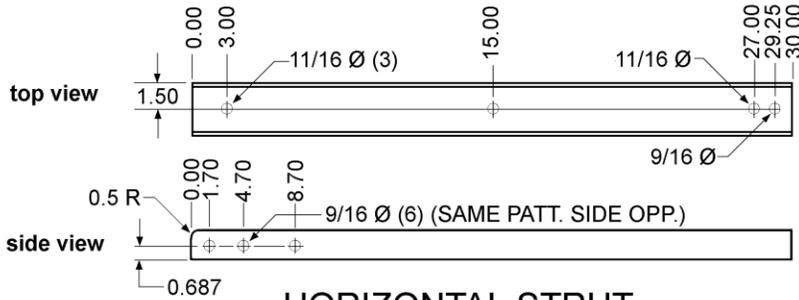


HORIZONTAL STRUT

fab from 3 x 4.1" channel, 1 per assembly



POLE SHOE

fab from 2 x 2 x 1/4" angle, or may be a welded assembly, 1 per assembly

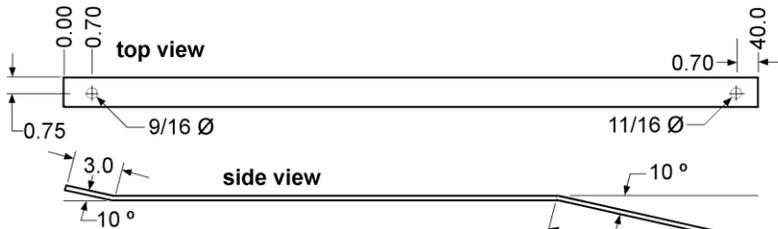

BRACE

fab from 1-1/2 x 1/4" FB, 2 per assembly


Item	Length, Inches	Material, Inches	Number Per Assembly
Horizontal Strut	30	3 x 4.1 Channel	1
Pole Shoe	9	2 x 2 x 1/4 Angle	1
Braces	40	1-1/2 x 1/4 FB	2

Galvanizing: All parts shall be hot-dipped galvanized after fabrication per ASTM A 153 (3 mils min.).

Packaging: Shall be in accordance with EEI Packaging Standards.

Reference Specifications: ASTM A 153

Stock Unit: EA

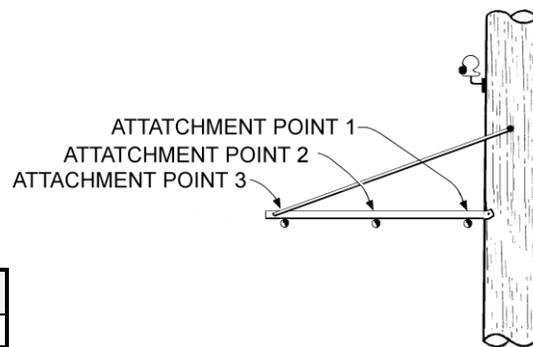

Stock Number	Approved Manufacturer
010408	Standard Steel Fabricating Co.

Standards Coordinator
 John Shipek

Standards Supervisor
 John Shipek

Unit Director
 Andrew Strong

Goldshield

Goldshield

AC Strong