


**CABLE WRAP
 POLYTETRAFLUORETHYLENE**

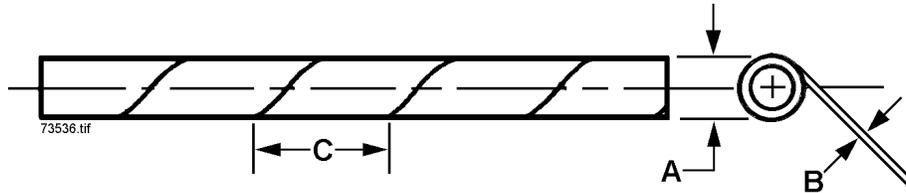

1. Scope

Cable Wrap of the configuration shown shall be Type III, Grade 2, Class B (Teflon) polytetrafluoroethylene meeting the material requirements of ASTM D 1457 and D 3369, latest revision.

2. Industry Standards

ASTM D 1457 Specification for Polytetrafluorethylene (PTFE) Molding and Extrusion Materials (Withdrawn 1996)

ASTM D 3369 Standard Specification for Polytetrafluoroethylene (PTFE) Resin Cast Film

3. Requirements

Color: The color of the cable wrap shall be natural (clear).

Stock No.	Size, inches	Dimensons, inches			Wire Bundle Diameter, in.
		A	B	C	
735361	0.250	0.250	0.025 – 0.035	0.375	3/16 to 2
735363	0.500	0.500	0.022 – 0.060	0.500	3/8 to 4

4. Packaging

Shipping containers shall be marked with the type, size, and quantity of the items, the City Purchase Order number, the name and address of the manufacturer, and the name and address of the City of Seattle receiving warehouse.

Approved Manufacturers

Stock No.	AMP	Panduit	Tyton	Wieland Spiroband
735361	500024-2	T25T-L	2P	–
735363	–	T50T-Q	–	SP 1/2-TF

Stock Unit: FT

STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Charles L. Shaffer</i>	<i>John Schinner</i>	<i>Hardee Juy</i>