


MATERIAL STANDARD

SIGN TOWER/CIRCUIT IDENTIFICATION 6" x 20"

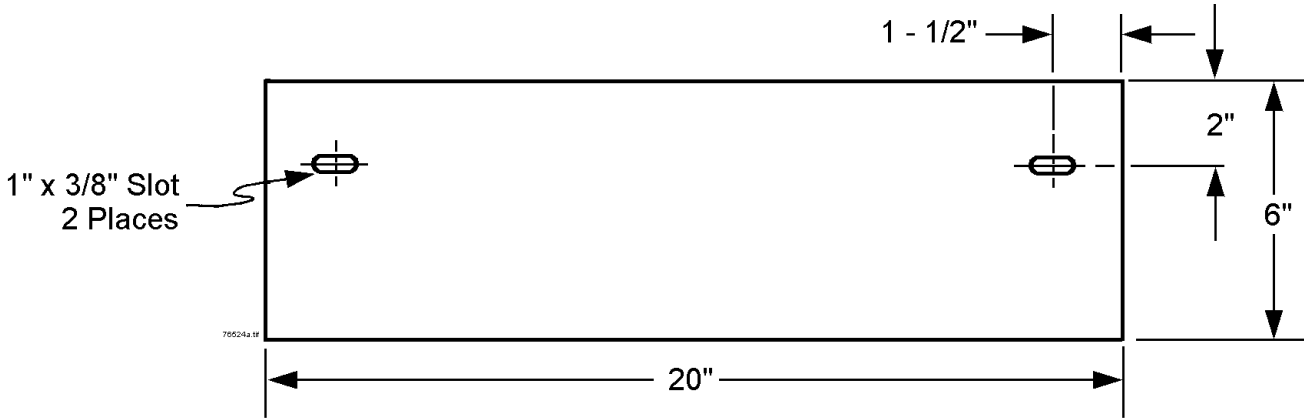

Tower/Circuit identification signs shall be of the configuration shown.

Material. Signs shall be made from 6-inch by 20-inch blanks of .0508" 6061 alloy aluminum sheet. The sign shall have two slots, 1" x 3/8", located in the positions shown, for mounting. The holes shall be punched and all the edges deburred.


Lettering. See page 2 for lettering specifications.

Finishing. See page 2 for finishing specifications.

Stock Number: 765210 (Includes only the aluminum sign. See page 2.)

Stock Unit: EA

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Jim S. Horn</i>	<i>Charles L. Shaffer</i>	<i>John C. Skinner</i>	<i>Betty Robini</i>

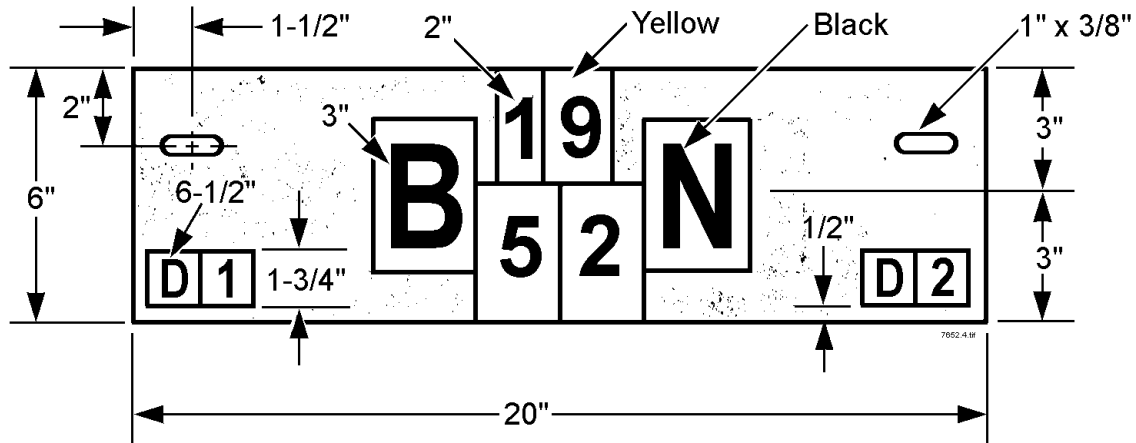MATERIAL STANDARD**SIGN
TOWER/CIRCUIT IDENTIFICATION
6" x 20"**

Tower/Circuit identification signs shall be of the configuration shown and shall meet the applicable requirements of the latest revisions to ANSI standard Z53.1, *Safety Color Code for Marking Physical Hazards*.

Lettering. Letters and numbers shall be black on a yellow background. They shall be fabricated from Minnesota Mining Company No. 3271 yellow *Scotchlite*® (or approved equal) and screened with No. 305 opaque black (or approved equal). The lettering and numbering shown on the example above are for illustration purposes only and are not necessarily representative of the actual sign. The size of the letters shall be as follows: 1-1/2" letters and numbers on 1-3/4"-high backing; 2" (numbers only) on 3" backing; and 3" (letters only) on 4" backing. Lettering is not part of Stock No. 765210, and is shown for example only.

Finishing. No finishing is needed other than installing the letters and numbers on the aluminum sign blank.

Reference Specification: ANSI Z53.1

Note: Lettering is shown only as an example of a typical installation. Letters and numbers are to be supplied by City Light crews, and are not part of Stock No. 765210.