


**MATERIAL STANDARD**

**GUARD,  
 PLASTIC WIRE**

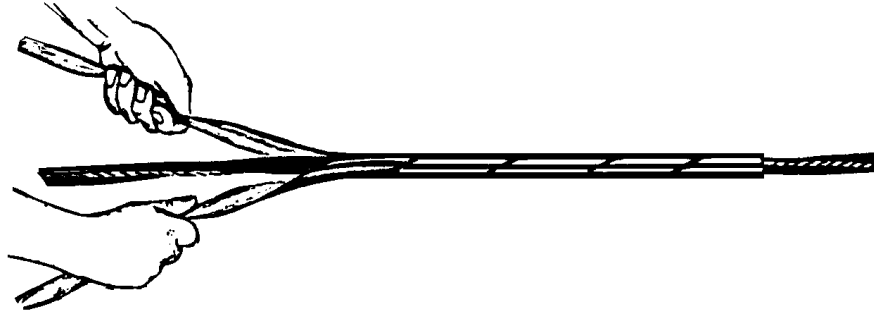

**Plastic Wire Guards** are used to protect conductors from mechanical abrasion from tree limbs or other obstructions.

Wire guards shall be made of high-strength, high-impact, polyvinyl chloride thermoplastic compound that has good abrasion resistance, a low-moisture absorption rate, and excellent weathering ability.

Wire guards shall be helically slit and cut to six-foot lengths.

Shipping containers shall be marked with the type, size, and quantity of the items, the City Purchase Order number, the name and address of the manufacturer, and the address of the Seattle City Light receiving warehouse.

**Stock Unit:** EA

Stock Number	Dimensions			Approved Manufacturers	
	ID, Inches	Wall Thickness, Inches	Length, Feet	Hubbell/Chance	Preformed
565180	1	0.093	6	PFG 32-38	PTG-0155

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
<i>Jim S. Horn</i>	<i>Charles L. Shaffer</i>	<i>John Chinner</i>	<i>Harold J. J.</i>