

## Decorative Luminaires, LED, Side-Mount, Modern, Roadway, Residential



### 1. Scope

This standard covers the requirements for modern light-emitting diode (LED), side-mount, residential roadway luminaires.

This standard applies to the following Seattle City Light (SCL) stock numbers:

Stock No.	Color	Description
014414	Dark bronze	Arieta side-mount LED luminaire
014415	Gray	Arieta side-mount LED luminaire
014395	Black	House side shield, field installable

### 2. Application

Decorative, side-mount, modern, LED residential roadway luminaires are:

- Installed in City-designated areas and SCL-designated streetlight districts and neighborhoods where a wider lineal distribution of light is intended. The distribution pattern is wider in the front to accommodate wider roadways and the light pattern on the ground is 1.5 times wider than the mounting height of the fixture
- Designed to be side-mounted on 4-inch square poles
- Equipped with built-in photocontrol receptacle with tool-less access for a standard, three-pin photocontrol
- Compatible with 20-year design life streetlight photocontrols as specified in SCL 5693.10

A shield may be installed on this luminaire to cut light off at 1/2 mounting height behind the luminaire.

Luminaires use Stock No. 014395, a field-installable house-side shield. Only one shield may be installed on a luminaire.

Streetlight Engineering shall pre-approve all installations of luminaire shields. Contact Streetlight Engineering for details.

This luminaire was first purchased for the Magnolia project.

In 2018, Seattle City Light began a transition from 4000°K CCT luminaires to 3000°K.

---

### 3. Industry Standards

Luminaires shall meet the applicable requirements of the following industry standards:

**ANSI/NEMA/ANSLG C78.377-2008**; Specifications for the Chromaticity of Solid State Lighting (SSL) Products

**ANSI C136.10-2010**; Locking-Type Photocontrol Devices and Mating Receptacles.

**ANSI C136.31-2010**; American National Standard for Roadway Lighting Equipment – Luminaire Vibration

**ANSI C136.37-2011**; American National Standard for Roadway and Area Lighting Equipment – Solid State Light Sources Used in Roadway and Area Lighting

**ANSI C136.41-2013**; Dimming Control Between an External Locking Type Photocontrol and Ballast or Driver

**ASTM B117-09**; Standard Practice for Operating Salt Spray (Fog) Apparatus

**ASTM D1654-08**; Standard Test Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments

**ASTM D523-08**; Standard Test Method for Specular Gloss

**ASTM G154-06**; Standard Practice for Operating Fluorescent Light Apparatus for UV Exposure of Nonmetallic Materials

**C136.15-2011 (or latest)**; American National Standard for Roadway and Area Lighting Equipment – Internal Labeling of Luminaires

**C136.22-2004 (R2009)**; American National Standard for Roadway and Area Lighting Equipment – Ingress Protection (Resistance to Dust, Solid Objects and Moisture) for Luminaire Enclosures

**Federal Trade Commission (FTC)**; Green Guides, 16 CFR Part 260; Guides for the Use of Environmental Marketing

**IEC 60529**; Degrees of protection provided by enclosures (IP Code), consolidated edition

**IEEE C62.41.2-2002**; IEEE Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and less) AC Power Circuits

**IES LM-79-08**; Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

**IES LM-80-08**; Approved Method: Measuring Lumen Maintenance of LED Lighting Sources

**IESNA TM-15-11 (revised)**; Luminaire Classification System for Outdoor Luminaires

**RoHS** (European Union Directive 2002/95/EC for Restriction of Hazardous Substance)  
**Title 47 of the Code of Federal Regulations (CFR), Part 15;** Radio Frequency Devices  
**UL 1598;** Luminaires; UL

## 4. Requirements

### 4.1 Luminaire Performance

Operating temperature, range	
°C	-40 to +40
°F	-40 to +104
Correlated Color Temperature (CCT), nominal, °K, per ANSI/NEMA/ANSI C78.377	3000 ± 200
Color rendering index (CRI), minimum	70
L70 lumen depreciation of LED light sources per IES LM-80, hours, minimum	100,000
Light distribution, IES	Type 2
Luminaire efficacy, lumens/watt, minimum, per IES LM-79, Section 11.0	100
Off-state power consumption, W, maximum	0.5
Vibration withstand, minimum, per ANSI C136.31	Level 2 (bridge/overpass application)

### 4.2 Power Supply/Driver

Input voltage, functional range, 60 Hz, Vac	120 to 277
Dimming control signal interface operative range, Vdc	0 to 10
Power factor, minimum	90

## 4.3 Construction

### 4.3.1 General

Luminaires shall be designed and constructed to meet the requirements of ANSI C136.37.

Luminaire features conforming to ANSI C136.37 shall include, but not be limited to:

- Mounting provisions
- Latching and hinging
- Terminal blocks
- Dimming
- Ingress protection
- Wiring and grounding
- Field-installable house side shields
- Full-field adjustable (FFA) capability
- 7-pin photo-control receptacle

Luminaires shall be RoHS (European Union Directive 2002/95/ED for Restriction of Hazardous Substance) compliant. Luminaires shall have less than the maximum concentration values of the following RoHS restricted substances:

- Mercury (Hg)
- Cadmium (Cd)
- Chromium VI (Cr +6)
- Polybrominated biphenyl (PBB)
- Polybrominated biphenyl ether (PBDE)
- Lead (Pb)

#### 4.3.2 Fixture Housing

Luminaire weight, lb, maximum	20
Effective projected area (EPA), ft <sup>2</sup> , maximum	0.8
External housing, ingress protection per IEC 60529	IP65
Optical chamber, ingress protection per IEC 60529	IP66

Luminaire housing shall be cast aluminum and allow for tool-less entry.

All tool-less fasteners and latches shall be die-cast aluminum and have the same finish as the luminaire housing.

All aesthetic exterior fasteners shall be corrosion resistant, die cast aluminum; painted the same color as the luminaire housing. Internal fasteners shall be stainless steel.

Photocontrol receptacle shall be located at the base of the luminaire and allow for tool-less entry.

Photocontrol mounting shall accommodate all SCL-approved photocontrols as stated in SCL 5693.10.

Luminaire cooling system shall consist of passive heat sink without fans, pumps, or liquids.

All polycarbonate components shall be UV stabilized.

Streetlight Engineering must pre-approve all installations of luminaire shields.

Luminaire shields shall be field-installable, flush-mounted, house-side type.

Shields shall be installed at 1/2 the mounting height of the luminaire.

Only one shield per luminaire shall be allowed. Contact Streetlight Engineering for details.

#### 4.3.3 Electrical

Power supply/driver shall be UL Recognized for dry and damp locations.

All other electrical components shall be UL Listed or Recognized for wet locations.

Luminaire photocontrol receptacle shall be designed and constructed to accept a standard plug type, locking, three-pole, three-wire, streetlight photo control, and shall be located at the base of the fixture.

Photocontrol receptacle shall have a minimum of five positions, as defined in ANSI C136.41-2013. Two dimming contacts shall be connected to the 0-10 VDC control signal interface on the power supply/driver with quick-disconnect connectors.

Rotational adjustment of the photocontrol shall be tool-less.


Luminaires shall meet the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 15 – Radio Frequency Devices.

A three-pole terminal block capable of accepting #14 to #6 AWG wire shall be mounted to the housing inside the electrical compartment.

The terminal block shall be capable of operation with a standard #2 flat blade screwdriver.

The terminal block shall be rotated such that the line side is oriented toward the LED array. See Figure 4.3.3.

**Figure 4.3.3. Terminal Block Orientation**

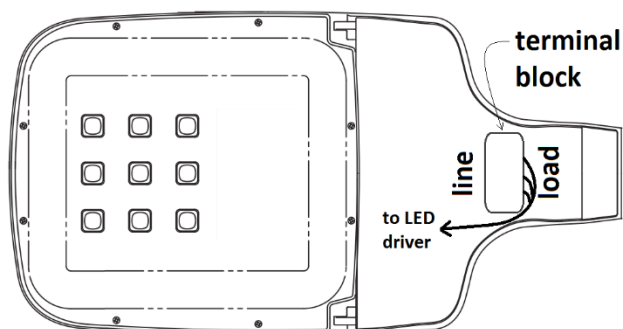

#### 4.3.4 Mounting

Luminaires shall be designed for side-mounting onto a 4-inch square pole.

#### 4.3.5 Finish and Color

Finish on housing shall be a powder coating with a minimum thickness of 100 microns and shall meet salt spray requirements of ASTM B 117 and the humidity resistance requirements of ASTM D 2247.

---

### 5. Detailed Requirements

Physical and electrical details for specific luminaires are provided below.

System power consumption, W, nominal	41
Weight, lb, nominal	16
EPA, ft <sup>2</sup>	0.47

---

### 6. Testing

Manufacturer shall provide test data that establishes compliance with the requirements of this material standard upon request.

Manufacturer shall provide proof of compliance with Certificate of RoHS (European Union Directive 2002/95/EC for Restriction of Hazardous Substances) upon request.

---

### 7. Design Changes

Manufacturer shall inform Seattle City Light in writing of all design changes that could affect the understood or published capabilities of the product.

## 8. Marking

### 8.1 Internal Labeling

A readily visible label shall be permanently affixed to the inside surface of each luminaire housing.

Internal label shall meet the requirements of ANSI C136.22.

Internal label shall include, but not be limited to, the following information:

- Manufacturer name and catalog number
- Month and year of manufacture
- Line input voltage
- Frequency if other than 60 Hertz
- Driver type (if applicable) (may be on driver if readily visible)
- Photocontrol voltage if different from line input voltage
- Lamp type, wattage, and voltage (if applicable; may be on driver if readily visible)
- Descriptive wiring diagram showing input terminals, ballast, capacitors, starting aid, photocontrol receptacle, lamp, and the like, as necessary
- Plant location
- Input power consumption
- Driver output current
- Driver output adjustment
- IEC IP rating
- Correlated color temperature (CCT)
- IES light distribution type
- IESNA TM-15 BUG ratings
- Serial number

### 8.2 Barcode

A barcode label shall be provided as specified in the purchase order.

### 8.3 Component Identification

All UL listed components shall be labeled or recognized as such.

---

## 9. Packaging

Luminaires shall be individually packaged to prevent damage during shipping, inside storage, and casual handling prior to installation.

Each package shall be legibly marked with:

- Manufacturer name
- Manufacturer catalog number
- Product description
- Date of manufacture (month and year)
- Seattle City Light stock number
- Seattle City Light purchase order number

Accessories shall be individually packaged to prevent damage during shipping, inside storage, and casual handling prior to installation.

Each package shall be legibly marked with:

- Product description
- Seattle City Light stock number

## 10. Issuance

Stock unit: EA

## 11. Approved Manufacturers

### Stock No. 014414

**Manufacturer:** Leotek

**Catalog Number:** AR13-6M2-MV-WW-2-DB-530-PCR7-WL-FFA-RTB

*where:*

AR13 = product, AR13

6M2 = LED number and type

MV = voltage, 120 277 Vac

WW = color temperature, 3000K

2 = light distribution, type 2

DB = finish, dark bronze

530 = drive current, 530 mA

PCR7 = options, 7-pin photocell receptacle, pre-wired

WL = options, utility wattage label

FFA = full field adjustability

RTB = rotate terminal block such that the line side is oriented toward the LED array

### Stock No. 014415

**Manufacturer:** Leotek

**Catalog Number:** AR13-6M2-MV-WW-2-GY-530-PCR7-WL-FFA-RTB

*where:*

AR13 = Product, AR13

6M2 = LED number and type

MV = voltage, 120-277 Vac

WW = color temperature, 3000K

2 = light distribution, type 2

GY = finish, gray

530 = drive current, 530 mA

PCR7 = options, 7-pin photocell receptacle, pre-wired

WL = options, utility wattage label

FFA = full field adjustability

RTB = rotate terminal block such that the line side is oriented toward the LED array

### Stock No. 014395, Field-Installable House Side Shield

**Manufacturer:** Leotek

**Catalog Number:** HSSAR13-6BK

**Description:** Flush-mounted house-side shield for LED streetlight luminaires

## 12. References

**SCL Material Standard 5693.10;** "Streetlight Photocontrols, 20-Year Design Life"

### 13. Sources

**Leotek AR13 M2 Series Specification Data Sheet for Stock No. 014414 – Dark Bronze;** October 18, 2018

**Leotek AR13 M2 Series Specification Data Sheet for Stock No. 014415 – Gray;** October 18, 2018

**Leotek drawing for House Side Shield HSSAR13-6BK;** October 18, 2018

**Li, Jesse;** SCL Streetlight Engineer and subject matter expert for 5725.25  
(jesse.li@seattle.gov)

**Vanderpool, Laura;** SCL Technical Writer and originator of 5725.25  
(laura.vanderpool@seattle.gov)