


**Conduit Fitting, Cable Protector**

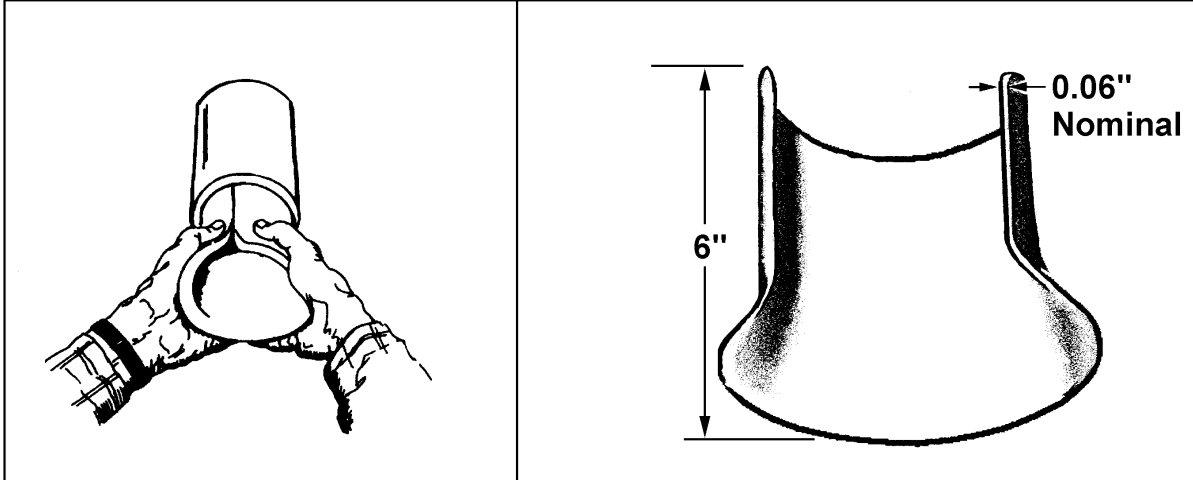

**Cable Protectors** for installation in duct and conduit ends shall be of the configuration shown, and shall be made from stress-relieved virgin nylon meeting the requirements of ASTM D789 or high-density polyethylene meeting the requirements of ASTM D1248. The material shall have the following additional requirements.

- Exceptional resistance to abrasion
- Low coefficient of friction
- Burning rate of 1.04"/minute or slower per ASTM D635
- Temperature range: -20 to +90°C., and retain uniform characteristics
- Resistant to weak acids and alkalis
- Color shall be white, light gray or other light colors which can be written on with a black marker. Black is unacceptable.

**Reference Specification:** ASTM D789, ASTM D1248, ASTM D635

**Stock Unit:** EA

Stock Number	Conduit Size (in)	Approved Manufacturers			
		Virginia Plastics	Anchor Industrial Plastics	Condux	Electrical Materials Co. (EMCO)
731800 E	2 to 2½	LG-225	APCP-2	80423-01	27-2 Grey
731801 E	3 to 6	LG-345	APCP-3	80423-00	27-1 Grey

In October 2015, this standard was renumbered from 7318.1 to 7050.09.

Standards Coordinator  
 Laura Vanderpool

Standards Supervisor  
 John Shippek

Unit Director  
 Darnell Cola