


DATE: Oct. 2, 1963

Rev: Aug. 24, 1989

FLAG, WARNING

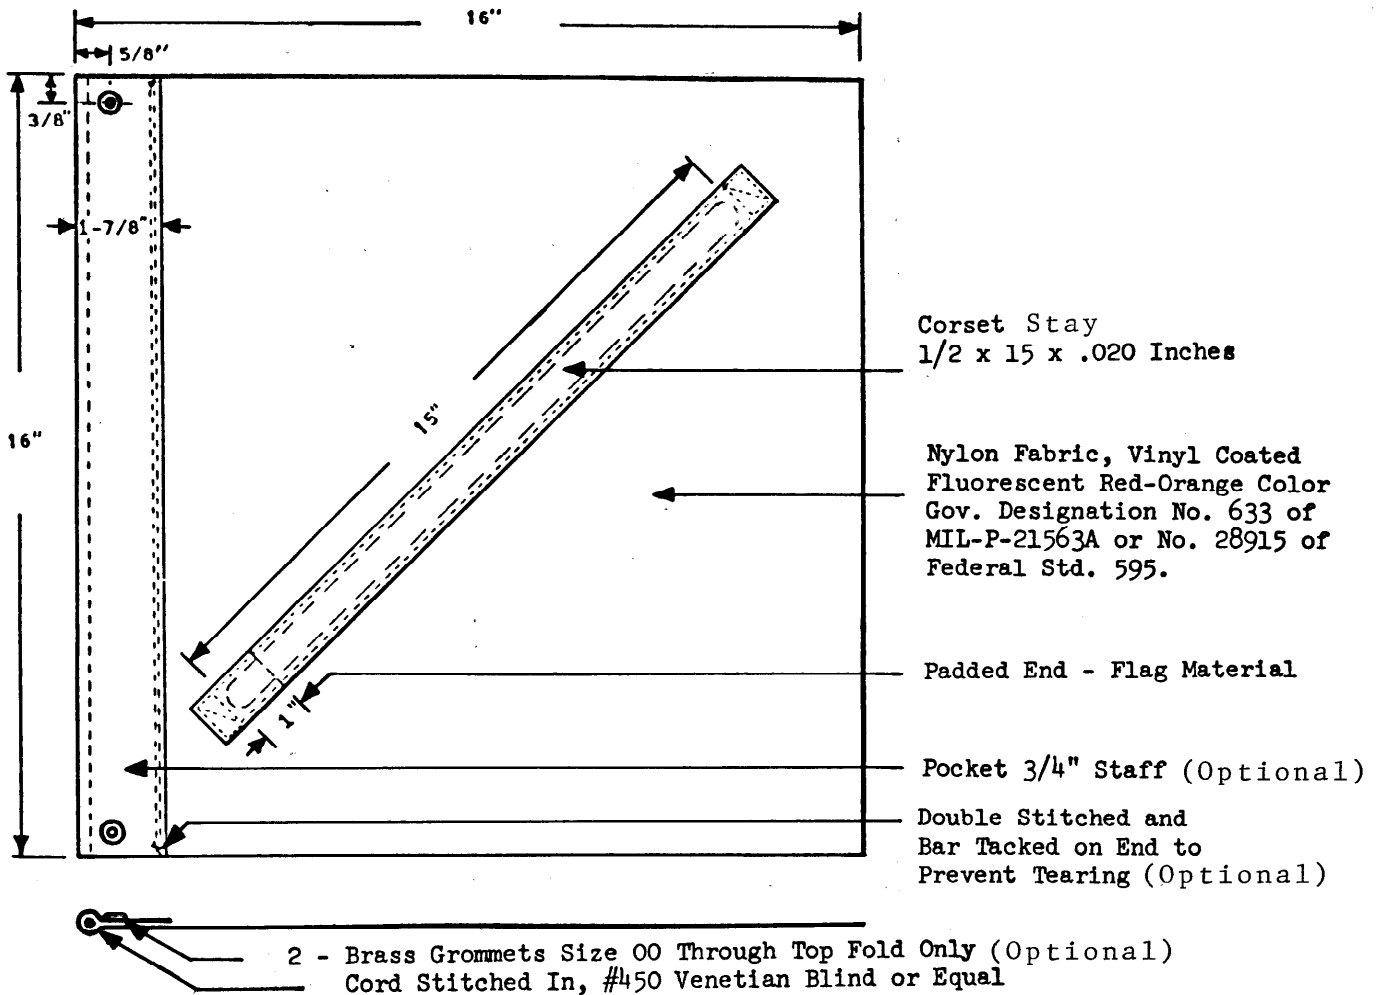

WARNING FLAG of the configuration shown shall be made of nylon fabric, heat sealed between vinyl plastic sheets. The nylon base fabric shall be at least 4 oz. per sq. yd., and shall be 13 oz. per sq. yd. after sealing in vinyl.

Color. The color shall be red-orange fluorescent matching Government Designation Color No. 633 of MIL-P-21563A or No. 28915 of Federal Standard 595.

Stitching. The thread shall be nylon size D-46 or equal, lock stitch, 7 stitches per inch, plus or minus one stitch.

Packaging and Shipping. Warning flags shall be packaged in accordance with the manufacturer's commercial practice to assure safe delivery without damage. Shipping containers shall be legibly marked with the type and quantity of items, the City Purchase Order number, the name and address of the manufacturer, and the address of the receiving warehouse.

Reference Specifications: MIL-P-21563A; Fed. Std. 595.  
Stock Unit: Each Stock Number: 762407

ORIGINATOR	STANDARDS COORDINATOR	STANDARDS SUPERVISOR	UNIT DIRECTOR
J E Perry	Allan O. Whitcomb	John Shumway	D. Bellis